


**SPECIFICATIONS**





Current Rating: 3Amps  
 Insulator resistance: 5000 Megohms min.  
 Dielectric Withstanding: AC 500V  
 Operating Temperature: -40° ~ +105° C  
 Contact Material: Brass  
 Insulator Material: PBT  
 Plating: Glod flash

UNSPECIFIED TOLERANCE: ±0.20

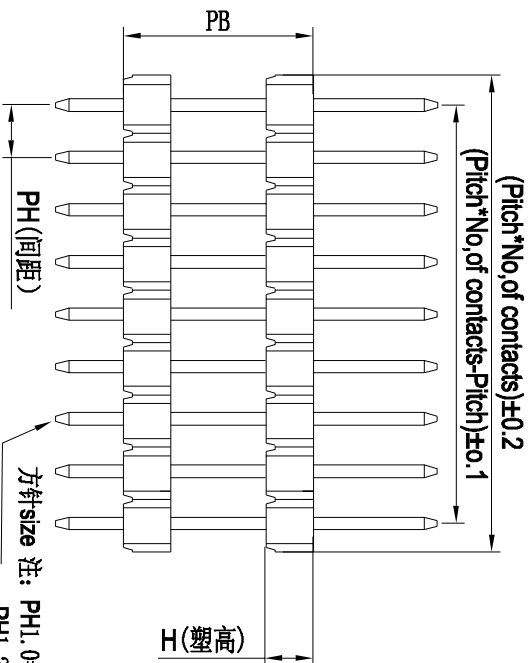

方针size 注:


PH1. 0=0.3\*0.3mm  
 PH1. 27=0.4\*0.4mm  
 PH2. 0=0.5\*0.5mm  
 PH2. 54=0.64\*0.64mm

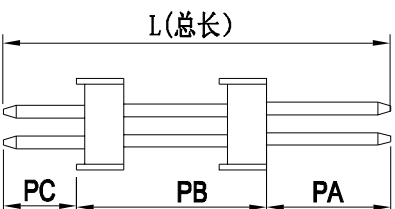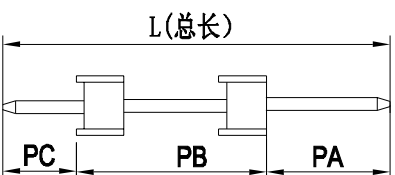

**KAPON TECHNOLOGY CO.,LTD**

**PIN HEADER 1.0/1.27/2.0/2.54Pitch DIP 180° 双塑NP**

Customer:	Approval:	Unit	Scale	Date
Drawing:张建军	Check:	mm		13.12.5



P/NO:

Pin Longer:

Signature: