


SPECIFICATIONS

Current Rating: 2Amps
 Insulator Resistance: 5000Megohms min.
 Dielectric Withstanding: AC 500v
 Operating Temperature: -40 ° ~ +105 ° c
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Phorphos bronze
 Insulator Material: NY-6T
 Finish: Gold flash

UNSPECIFIED TOLERANCE: ±0.20

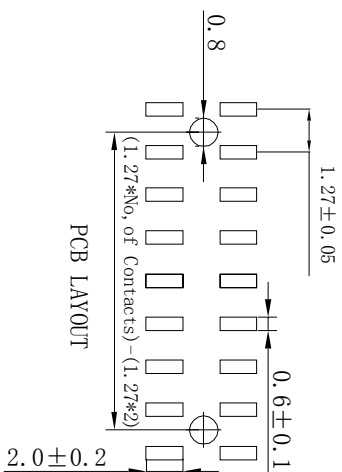


注: H有 2.0、3.4、4.3
 定位柱可有可无
 Unit:mm

KAPON TECHNOLOGY CO.,LTD

Female Header Pitch 1.27 双排SMD排母 2*NP

Customer:	Approval:	Scale	Date
Drawing No.:张建军	Check:杨观辉	mm	12.5.20



P/NO:

Pin Longer:

Signaturer: