


注：H有5.0、7.1、8.5  
 端子结构 U型  
 Unit:mm

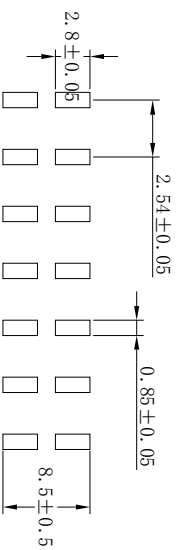


PCB LAYOUT

**SPECIFICATIONS**  
 Current Rating: 3Amps  
 Insulator resistance: 5000 Megohms min.  
 Dielectric Withstanding: AC 500V  
 Operating Temperature: -40 ° C to +105 ° C  
 Contact Material: Phosphor Bronze  
 Insulator Material: PA6T  
 Plat: Gold flash  
 Unspecified tolerance: ±0.20

**KAPON TECHNOLOGY CO.,LTD**

Female Header Pitch 2.54 2\*NP SMD

Customer:	Approval:	Unit Scale	Date
Drawing No: 张建军	Check:	mm	13.8.5



Pin Longerr:

Signature: