
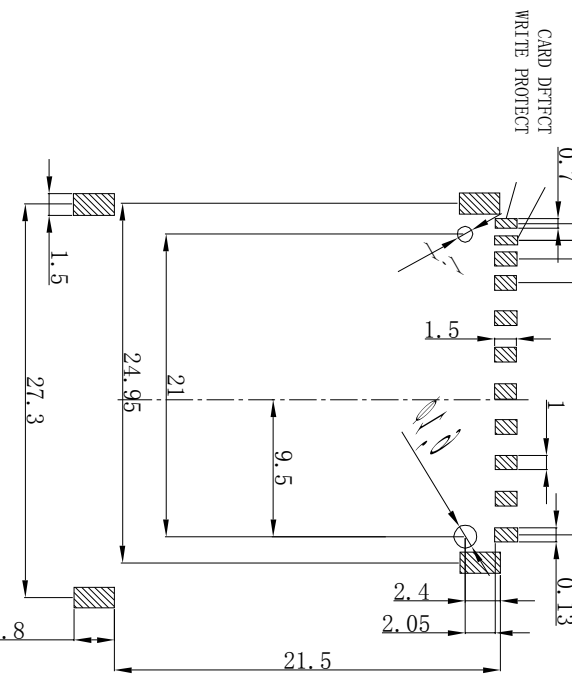


REVNO	REVISION NOTE	DATE	SIGNATURE
A/0	RELEASED	2006.12.20	P.king.S




RECOMMENDED P. C. B LAYOUT  
(General tolerance  $\pm 0.05$ )

Specification

- \*Electrical Characteristics:
- Contact Current Rating: 0.5 Amperes.
- Dielectric Withstanding Voltage: AC300V r. m. s.
- Insulation Resistance: 1000m $\Omega$  Minimum.
- contact Resistance: 40m $\Omega$  Maximum.
- \*Environmental:
- Operating Temperature: -25C $\sim$ +90C.
- \*Mechanical Characteristics:
- Contact insertion Force: 40 N Maximum.
- Contact Separation Force: 2 N Minimum.
- \*Material:
- Insulator: HI-temp plastic UI 94V-0 Rated
- Contact: Copper Alloy.
- Shell: stainless Steel
- Spring: Copper Alloy

Pin No.	NAME
1	CD/DA13
2	CMD
3	Vss1
4	VDD
5	CLK
6	Vss2
7	DAT0
8	DAT1
9	DAT2

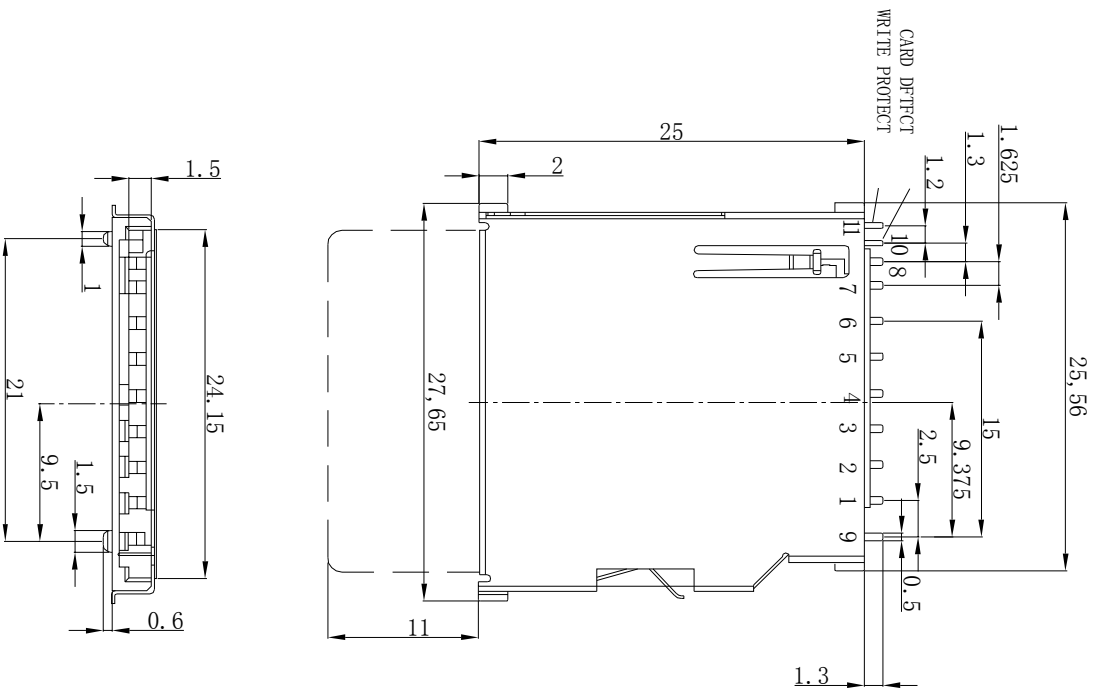

<b>KAPON</b>		深圳市卡邦科技有限公司	
KAPON TECHNOLOGY CO., LTD			
SD CARD 长型	UNIT	DESIGNED	TOLERANCE
	mm	ta.ji	$\pm 0.05$
PART NUMBER: SD-5010-02	SCALE	CHECKED	
	1:1	ta.ji	
DRAWING NUMBER: DWG-SD501	SHEET	APPROVED	
	1/1		

