
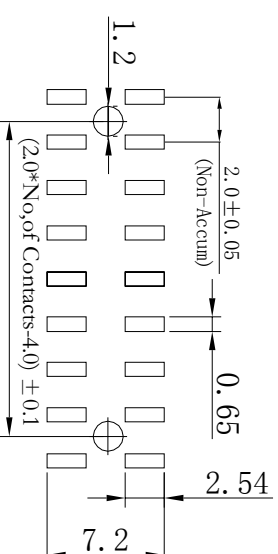

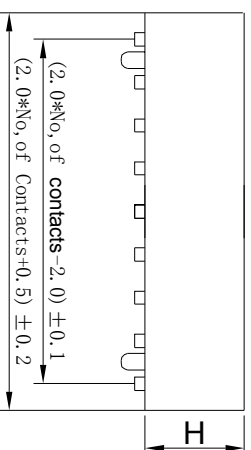



SPECIFICATIONS

Current Rating: 2Amps
 Insulator Resistance: 1000M Ω min.
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40 $^{\circ}$ ~ +105 $^{\circ}$ C
 Max Processing Temp: 250 $^{\circ}$ for 10 seconds
 Contact Material: Phorpius bronze
 Insulator Material: PA6T
 Finish: Gold flash

UNSPECIFIED TOLERANCE: ± 0.20

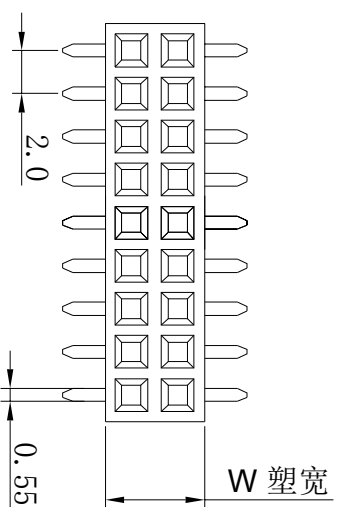


PCB LAYOUT

注: W有4.0、4.5
 H有2.0、4.3
 Unit:mm

KAPON TECHNOLOGY CO., LTD

Female header pitch2.0 双排SMD 2*NP

Customer:	Approval:	Unit Scale	Date
Drawing No:张建军	Check:	mm	13.3.22



P/NO:
 Pin Longer:
 Signatuer: