





PIN (0.6\*0.40) ± 0.05

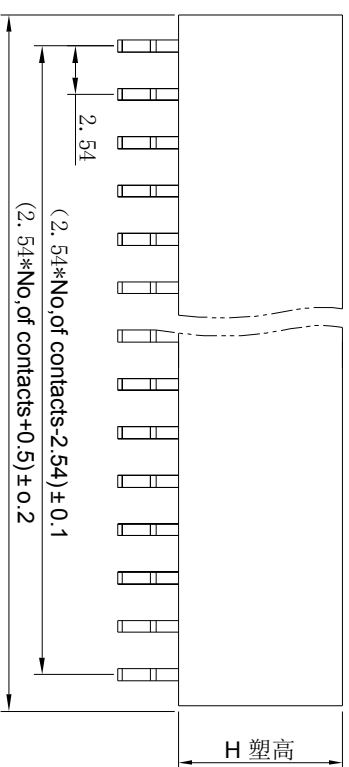


注: H有: 5.7、8.5  
端子结构: Y型  
Unit:mm

**SPECIFICATIONS**

Current Rating: 3Amps  
 Insulator Resistance: 5000Megohms min.  
 Dielectric Withstanding: AC 500V  
 Operating Temperature: -40 ° ~ +105 ° c  
 Contact Material: Brass  
 Insulator Material: PA46  
 Finish: Gold Flash  
 UNSPECIFIED TOLERANCE: ± 0.20



PCB LAYOUT

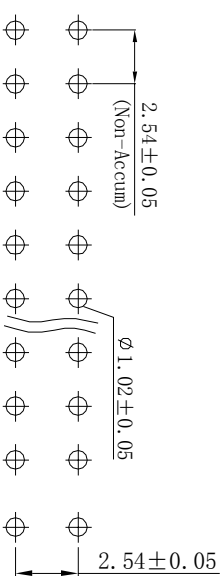


PCB LAYOUT

**KAPON TECHNOLOGY CO.,LTD**

Female header pitch2.54 单双排90度 NP

Customer:	Drawn: Nancy	Unit	Scale	Date
Drawing No:张建军	Check:	mm		13.8.29



P/NO:

Pin Longer:

Signatuer: