
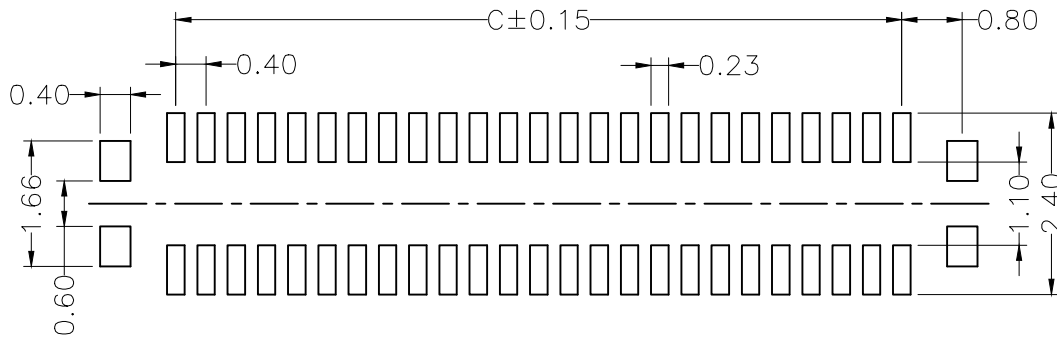



0.14*0.08 TYP.

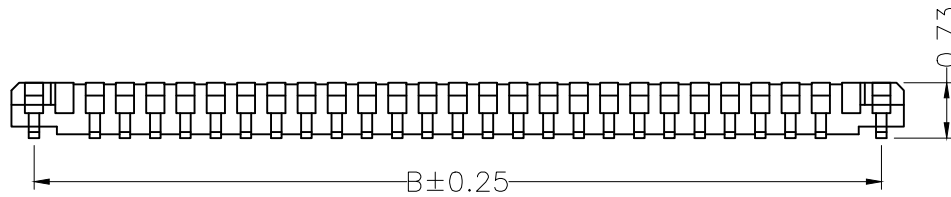

RECOMMENDED PCB LAYOUT
CONNECTOR SIDE

SPECIFICATIONS:

- 1.VOLTAGE/CURRENT RATING: 30V/0.3A AC;
- 2.WITHSTANDING VOLTAGE: 100V AC ONE MINUTE;
- 3.INSULATION RESISTANCE: 50MΩ MIN;
- 4.CONTACT RESISTANCE: 100mΩ MAX;
- 5.OPERATING TEMPERATURE RANGE: -35° C TO 85° C.

MATERIAL:

- 1.INSULATOR: LCP UL 94V-0 BLACK;
- 2.TERMINAL: COPPER ALLOY;
- 3.METAL FITTINGS: COPPER ALLOY.

PLATING:

- 1.TERMINAL: GOLD PLATING,
NICKEL 50u" MIN. OVER ALL;
- 2.METAL FITTINGS: TIN 100u" MIN. OVER NICKEL 50u"MIN.

PIN NO.	A	B	C
10	3.80	3.20	1.60
24	6.60	6.00	4.40
30	7.80	7.20	5.60
34	8.60	8.00	6.40
36	9.00	8.40	6.80
40	9.80	9.20	7.60
50	11.80	11.20	9.60
60	13.80	13.20	11.60

△	DATE	ECR	深圳市卡邦科技有限公司 KAPON TECHNOLOGY CO.,LTD.				PART NAME: BTB P0.40 HEADER			S/C NO	TOLERANCE	
											X. ±0.5	.X ±2°
											.X ±0.30	.XX ±1
			APPROVED	CHECKED	DRAWING	DWG NO.	DATE	REV	SCALE	UNIT	SHEET	.XX ±0.20
								A	FIT	mm	10F1	.XXX ±0.10