


NO	변경 사항	수정 내용	비고	수정	일시	승인	일시
①	3개소 형상 변경	변경점 통보서에 의거		2012.05.08	2012.05.08	C.W.D	2012.05.09
②							
③							

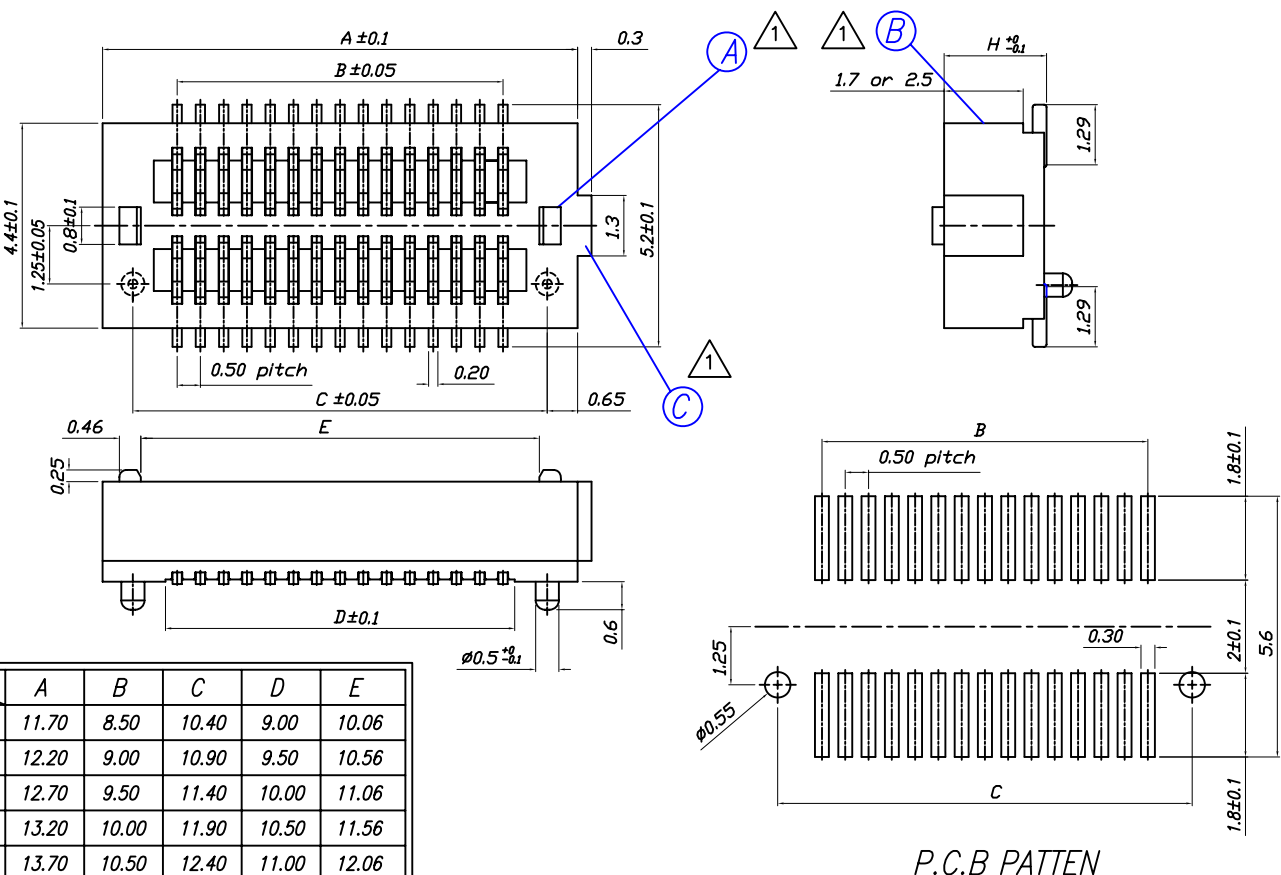

HIGH	SOCKET(H)	PLUG(H)
3.0	2.2	0.8
3.5	2.2	1.3
4.0	3.0	1.0
4.5	3.5	1.0
5.0	4.0	1.0
5.5	4.5	1.0
6.0	4.0	2.0
6.5	4.5	2.0

	A	B	C	D	E		A	B	C	D	E
08P	4.70	1.50	3.40	2.00	3.06	36P	11.70	8.50	10.40	9.00	10.06
10P	5.20	2.00	3.90	2.50	3.56	38P	12.20	9.00	10.90	9.50	10.56
12P	5.70	2.50	4.40	3.00	4.06	40P	12.70	9.50	11.40	10.00	11.06
14P	6.20	3.00	4.90	3.50	4.56	42P	13.20	10.00	11.90	10.50	11.56
16P	6.70	3.50	5.40	4.00	5.06	44P	13.70	10.50	12.40	11.00	12.06
18P	7.20	4.00	5.90	4.50	5.56	46P	14.20	11.00	12.90	11.50	12.56
20P	7.70	4.50	6.40	5.00	6.06	48P	14.70	11.50	13.40	12.00	13.06
22P	8.20	5.00	6.90	5.50	6.56	50P	15.20	12.00	13.90	12.50	13.56
24P	8.70	5.50	7.40	6.00	7.06	60P	17.70	14.50	16.40	15.00	16.06
26P	9.20	6.00	7.90	6.50	7.56	70P	20.20	17.00	18.90	17.50	18.56
28P	9.70	6.50	8.40	7.00	8.06	80P	22.70	19.50	21.40	20.00	21.06
30P	10.20	7.00	8.90	7.50	8.56	90P	25.20	22.00	23.90	22.50	23.56
32P	10.70	7.50	9.40	8.00	9.06	100P	27.70	24.50	26.40	25.00	26.06
34P	11.20	8.00	9.90	8.50	9.56						

KAPON KAPON TECHNOLOGY CO., LTD Min:0.03 μ m Gold plating over Min:1.2 μ m Nickel

DRAW NO	SOCKET	PA 6T	QUANTITY	CS210R-SH : 10.2(phosphor bronze)	TREATMENT	REFERENCE
①		MATERIAL	SCALE	TOLERANCE	WK NAME NO.5mm SOCKET-LK PART NAME 0.5mm BOARD TO BOARD DRAW NO.	
②		THROUGH HOLE PROJECTION	UNIT mm	X20±0.05		
③		APPROVAL	CHECK	DESIGN		
④				DRAW		
MARK	DATE	REVISION	SIGN			