

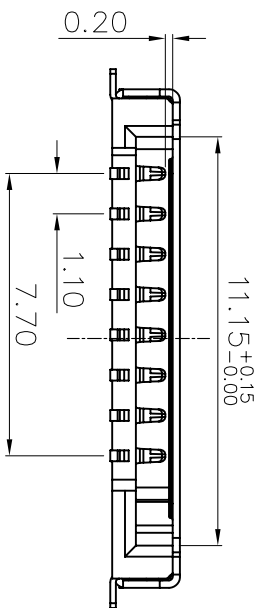
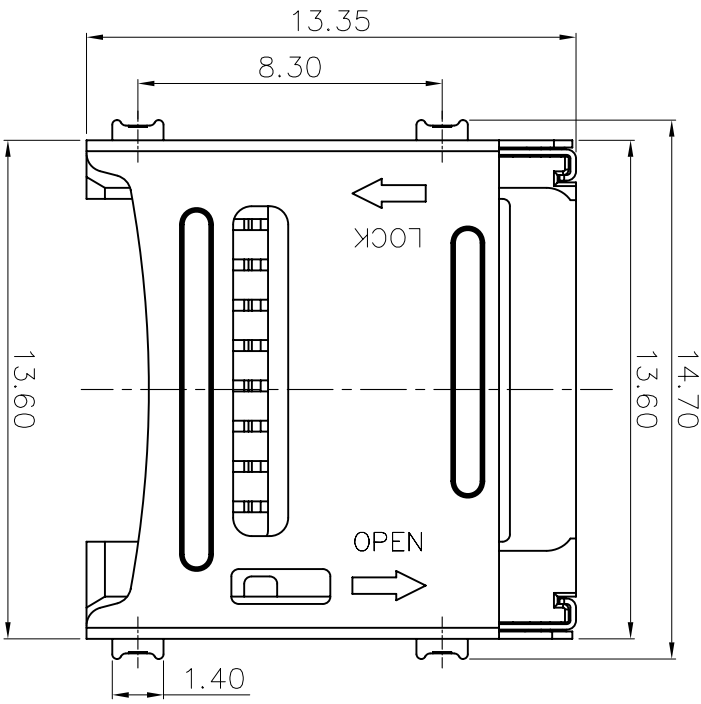
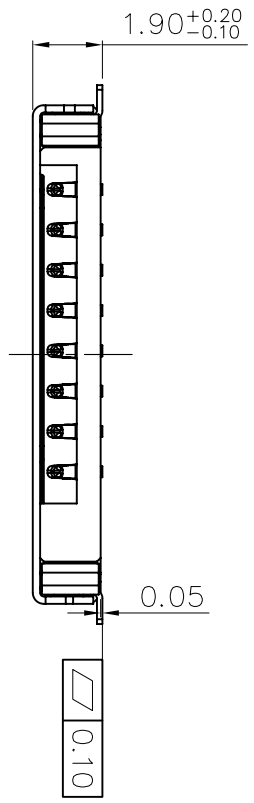


MARK	ECN NO:	APPROVE

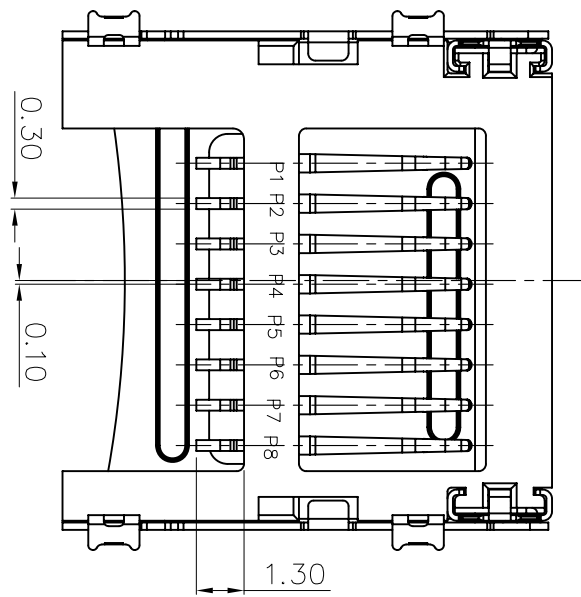


Slide Shell
Open


Slide Shell
Lock

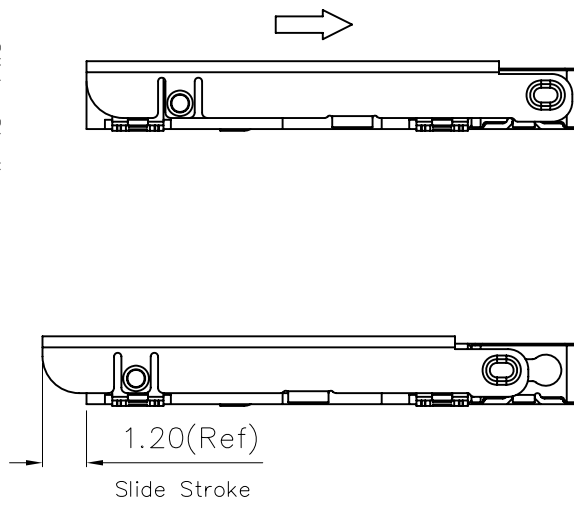

TOLERANCE UNLESS OTHERWISE SPECIFIED	UNIT	深圳市卡邦科技有限公司	
X ± 0.25	m m	DATE	08.03.18
X ± 0.15	X ± 8°	DRAWN	Kaissong
.XX ± 0.10	X ± 4°	DWG NO	TF01-30-1000
	.XX ± 2°	CHECKED	
		TITLE	TF top no push push type
		SHEET	1/3
		SCALE	1:1
		PROJ.	CUSTOMER DRAWING

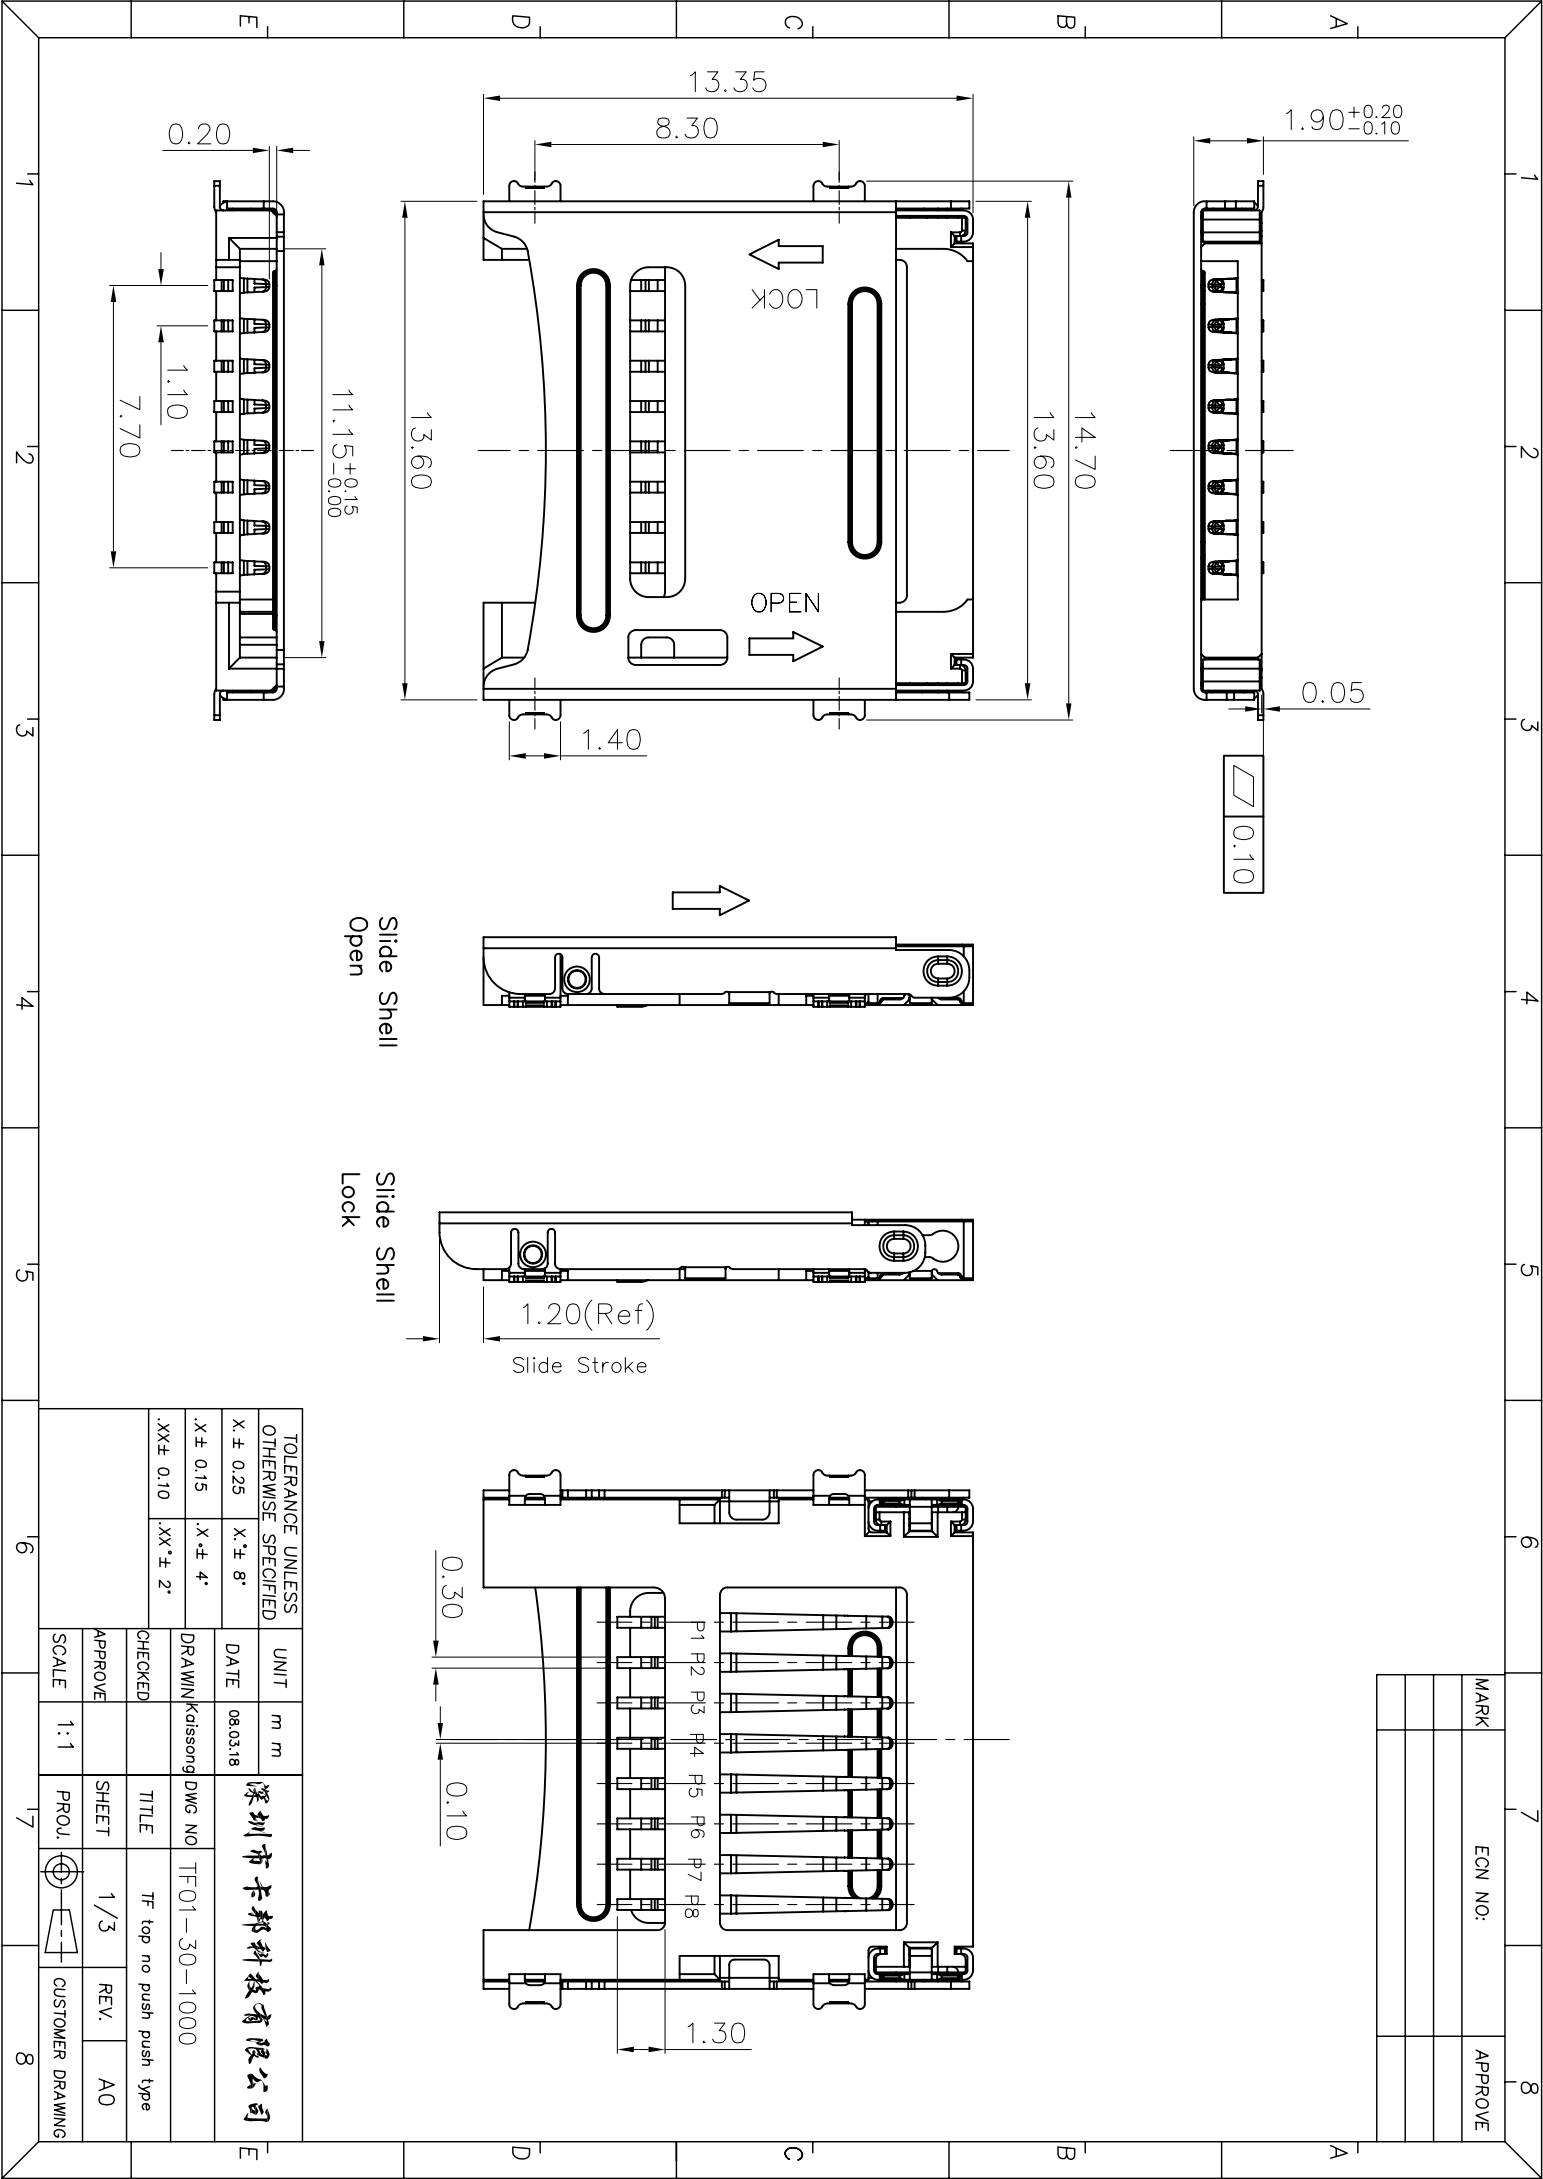


MARK	ECN NO:	APPROVE

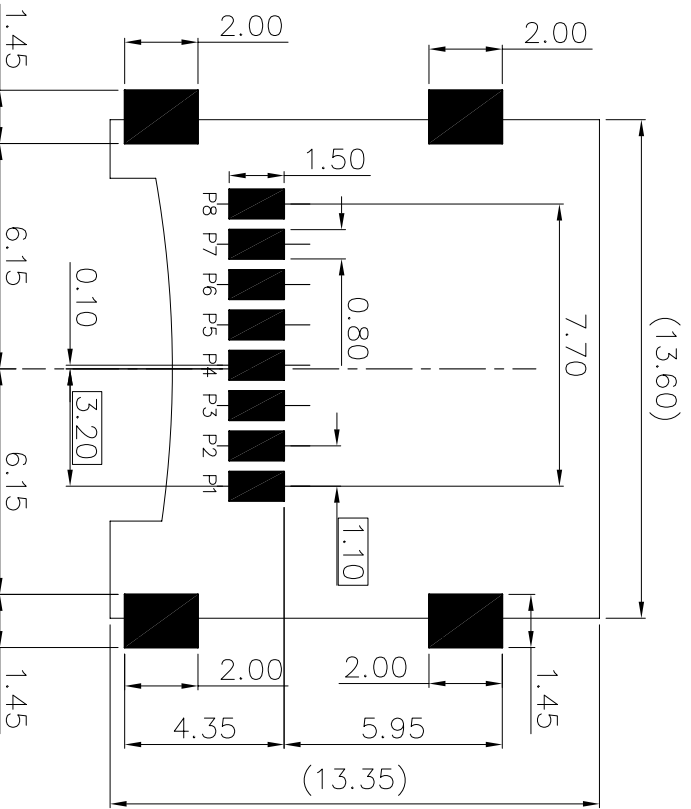

RECOMMENDED PCB LAYOUT
(ALL TOLERANCE ARE ±0.05)

Pin No.	
P1	DATA2
P2	CD\DATA3
P3	CMD
P4	VDD
P5	CLK
P6	VSS
P7	DAT0
P8	DAT1 ²

TFR CARD

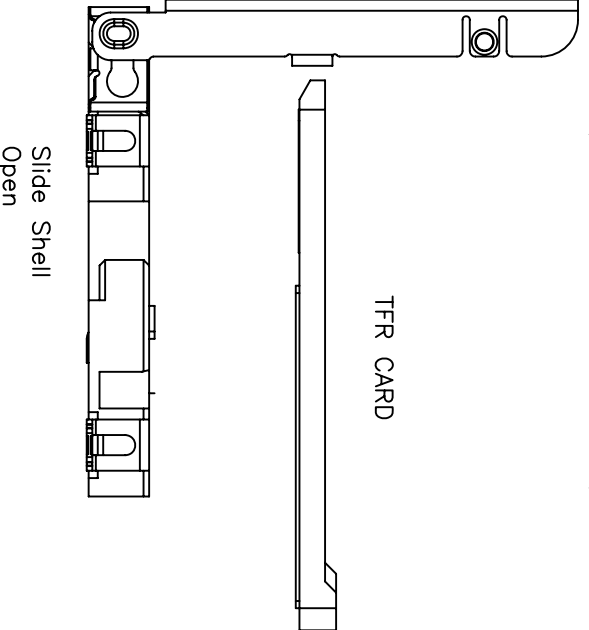


1. Material:
- 1.1 Housing: HI-Temp plastic UL 94V-0 Rated.
 - 1.2 Contact: Copper Alloy(C5191H t=0.15mm).
 - 1.3 Grounding: Copper Alloy(C2680H t=0.15mm).
 - 1.4 Shell: Stainless Steel(SUS304 t=0.15mm).
2. Specification:
- *Electrical Characteristics:
- 2.1 Current Rating: 0.5A.
 - 2.2 Voltage Rating: 250V AC/DC
 - 2.3 Dielectric Withstanding Voltage: AC 500V r.m.s.
 - 2.4 Insulation Resistance: 1000 MΩminimum at DC 500V.
 - 2.5 Contact Resistance: 100 mΩmaximum.
- *Mechanical Performance:
- 2.6 Contact Retention Force: 3.0N min./per contact
 - 2.7 Mating Force: 9.8N Max
 - 2.8 Umating Force: 1.47N min and 9.80N max
- *Environmental:
- 2.9 Operating Temperature: -20°~60°
3. Ordering Information:
- PTFAT0-08GLB2S004-AA
- Insulator Material
- L:ICP
- Housing color
- B:black
- Shell Plating Code
- 00:No plating
- packing mode
- 4:TAPE REEL
- Contact Plating Code
- 2S: Solder Tail Tin Plated
- Contact Area 3u"Gold Plated

UNIT	m m	深圳市卡邦科技有限公司	
DATE	08.03.18	DWG NO	TF01-30-1000
DRAWN	Kaissong	TITLE	TF top no push push type
CHECKED		SHEET	2/3
APPROVE		PROJ.	CUSTOMER DRAWING
SCALE	1:1	REV.	AO

MARK	ECN NO.	APPROVE

三:


- 1) 用Tape将纸箱封实.
- 2) 将标签贴在纸箱侧麦上方.

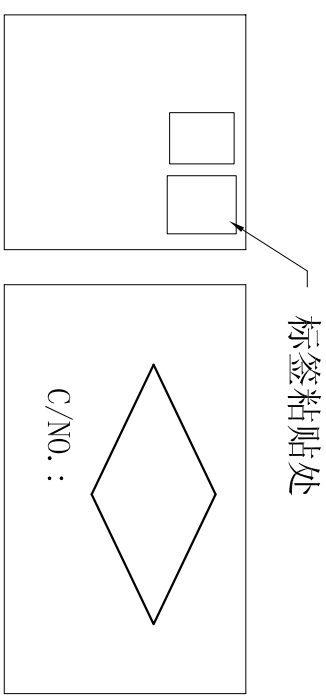


备 注 (REMARK)

- 1) 若有未装满之零数箱, 必须以缓冲材塞满.
- 2) 包装盘每盘上贴上小标签.
- 3) 在搬运过程中要轻拿轻放.
- 4) 在运输中不可堆放过多, 不可有重压现象.
- 5) 包装中有Carrier 断带, 该卷以零数卷包装.
- 6) Cover 与Carrier Type 不可有自动脱离现象.
- 7) 卷头至少须留300mm, 卷尾至少须留200mm, 以Cover 封住.

- 1) 一个纸箱可放置10个包装盘.
- 2) 一个纸箱可放10000个成品.
- 3) Reel放入PE袋内.
- 4) 干燥剂放入PE袋内, REEL 盘上下各一包(5g).

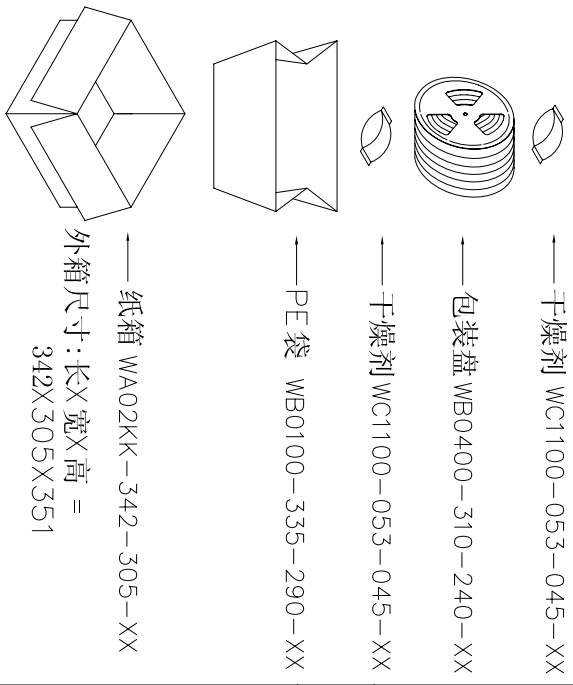

- 1) 将半成品一一放入包装盘内, 依同一方向放入.
- 2) 包装时, 依图所示.
- 3) 一个包装盘放置1000个成品.
- 4) Cover 不可盖住Carrier Type孔.

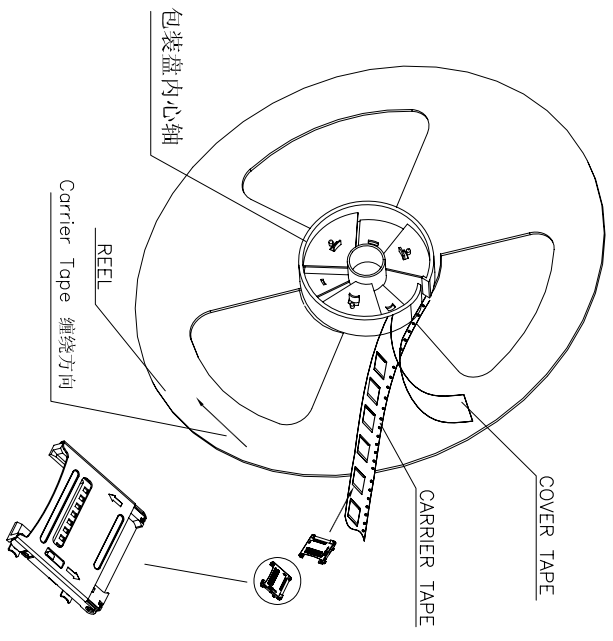

UNIT	m m	深圳市卡邦科技有限公司			
DATE	08.04.18	DWG NO	TF01-30-1000		
DRAWN	Kaissong	TITLE	TF top no push push type		
CHECKED		SHEET	3/3	REV.	AO
APPROVE		SCALE	1:1	PROL.	CUSTOMER DRAWING